

## Introduction

Sonae Novobord is part of the Sonae Industria Group, one of the largest producers of wood based panel products in the world and a leading manufacturer of particleboard and medium density fibreboard (mdf) products in Southern Africa.

Sonae Novobord distribute via stockists nationally and throughout Africa.

Novolam is made by fusing a decorative melamine impregnated paper permanently onto the surface of particleboard or mdf.

The Quality Management System of Sonae Novobord has been assessed and found to satisfy the SABS ISO 9001 requirements.



# novolam<sup>TM</sup>

## melamine finishes that last



◆ \*Pure White



Supreme White



◆ \*Windsor Grey



◆ Medium Cream



◆ \*Ebony



Balsa



Light Cherry



Washed Shale



\*Canadian Maple



\*Natural Oak



\*Beech



\*Memphis Cherry



Lunar Ash



Plum Tree



\*Cherry Royale



\*Royal Mahogany<sup>TM</sup>



◆ Sahara



◆ \*Burnt Oak



Laricina<sup>TM</sup>



◆ Aged Stone



\*Indian Ebony<sup>TM</sup>



French Walnut



\*Mozambique Wenge



◆ \*Smoked Cedar<sup>TM</sup>

Also available in  
◆ Silhouette

\*Also available in  
**novodécór**<sup>TM</sup>  
Laminated finishes that inspire

## Applications

Novolam provides the ideal finishes for:

- kitchens
- shelving
- built-in-cupboards
- wardrobes
- headboards
- occasional tables
- room dividers
- desks
- display units
- partitions
- paneling

## Standard

Sizes available  
2750mm X 1830mm  
Other sizes and thicknesses  
available upon request.

## Edging strips

Matching edging strips are available in either melamine or PVC.

## Edging products available from

- EdgePro
- National Edging
- Rehau
- Upper Edge Products
- Woodstock Edging

## Available finishes

The following surface finishes are available:

- silhouette (new range)
- textured
- alpine embossed woodgrain

## Cleaning instructions

Use soapy water or a commercial cleaner. The use of abrasives should be avoided.

## Chemical resistance

Normal household chemicals either have no effect or a very slight effect on novolam. Concentrated chemicals should not be left in contact for long periods.

## Heat resistance

The melamine coating on novolam can support a superficial temperature of 120° for at least ten minutes and 170° for at least three minutes.



www.sonae.co.za



+27 11 236 1400



info@sonae.co.za




# Sonae Novobord

A company of the group







V AFRICAN WENGE  
IN FUSION

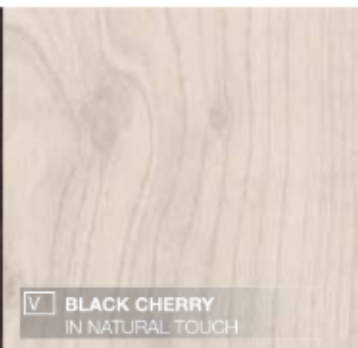

V BLACK CHERRY  
IN NATURAL TOUCH

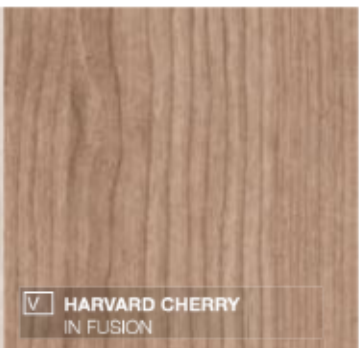


V HARVARD CHERRY  
IN FUSION

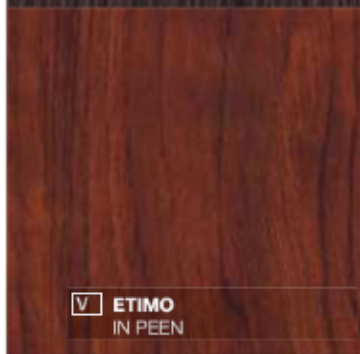

V ETIMO  
IN PEEN



V AMERICAN WALNUT  
IN FUSION

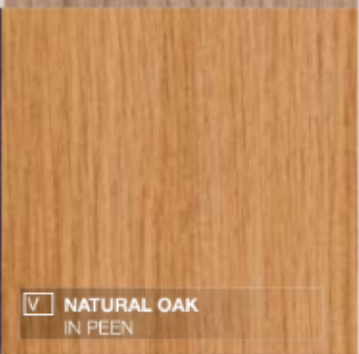

V NATURAL OAK  
IN PEEN



V BURGAN MAHOGANY  
IN PEEN



V SHALE OAK  
IN NATURAL TOUCH



V CADBURY OAK  
IN FUSION



V SUMMER OAK  
IN LINEAR



V VANCOUVER MAPLE  
IN PEEN



V WINDSOR CHERRY  
IN PEEN